




ANALYTIC SYSTEMS

Power Conversion Solutions

FULLY ISOLATED DC/DC CONVERTER

MODEL VTC1000 Series

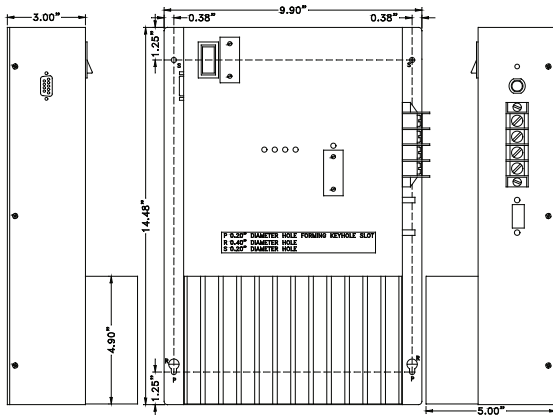

Description

The model VTC1000 Voltage Converter supplies 12V, 24V or 48 VDC from a 110V, 220V or 300 VDC power source. Other input or output voltages up to 360 volts are also available by special order.

The all-new Current Mode switching design offers increased power and reliability in a compact package. Extra input and output filtering reduce EMI to extremely low levels. Reliability features include an input fuse, thermal shutdown, current limiting and short circuit shutdown with automatic recovery.

The output voltage is easily adjusted 1.0 volts above or below the standard output voltage to accommodate special requirements. Optional features include a Remote Control, a Digital Volt Ammeter, Battery Charging and/or a 19" Rack Mount version.

Benefits

- Ultra-quiet
- Power sensitive electronics without interference
- Rugged and reliable to ensure years of safe and trouble free operation

Design Features

- Fully Isolated Design
- Adjustable output voltage
- Audible and visual indicators for constant current, low input voltage, low output voltage and over-temperature
- Over-temperature shutdown
- Short circuit protection
- Output overvoltage crowbar
- Cycle by cycle current limiting
- Reverse input protection
- Transient Voltage Suppression
- Ultra-quiet low EMI operation
- Dry contact output fail relay
- Custom input voltages from 105 to 360 VDC
- Custom output voltages from 12 to 55 VDC
- Remote control option
- Digital Volt/Ammeter option
- 19" Rackmount Option
- Wide-Temperature operation Available
- Conformal Coating and/or Harsh Environment Ruggedization Available

Applications

- Marine & other rugged environments
- Electric Utilities and Substations
- Manufacturing Plants
- Steel Mills
- Military Applications (COTS)
- Industrial Controls
- OEM Applications
- Solar / Alternative Power Systems
- Fuel Cells

An ISO9001 and AS9100 Registered Company Battery Chargers • Inverters • Power Supplies • Voltage Converters

8128 River Way, Delta B.C. V4G 1K5 Canada T. 604.946.9981 F. 604.946.9983 TF. 800.668.3884 (US/CANADA)

www.analysystems.com

FULLY ISOLATED DC/DC CONVERTER

MODEL VTC1000 Series

Electrical (Input)			
Nominal (ip)	110	250	300
Actual (Vdc)	100-140	230-280	280-360
Input Amps (max)	14.5	6.3	5.2
Input Fuse (MDA)	20	10	6
Noise on Input	< 50 mV		
Electrical (Output)			
Output Nominal (op)	12	24	48
Output Volts (DC)	13.6 ± 0.05	27.2 ± 0.05	54.4 ± 0.05
Output Amps	60 cont. / 70 peak	40 cont. / 45 peak	20 cont. / 22.5 peak
Output Crowbar	16.0 ± 0.5V	32.0 ± 1.0V	63.9 ± 2.0V
Output Adjustment	± 1.0 Vdc		
Output Ripple & Noise	< 50 mV		
Transient Response	< 2V for 50% Surge		
Regulation (Line & Load)	< +/- 0.5%		
Duty Cycle	Peak 20% for 10 min max Continuous 100% for 24 hours per day		
Efficiency	> 85% @ Maximum Output		
Environment Specification			
Operating Temp. Range	-25° to +40°C @ maximum output Derate Linearly 2.5% per °C from 40°C (Optional -40°C - +55°C extra wide temp. operation avail.)		
Humidity	0 - 95% Relative Humidity (non-condensing) with standard conformal coating		
Audible Noise	NONE Ødb @ 3 ft (34.5 dB when fan operating)		
Typical Service Life	> 10 yrs. (87,600 hrs)		
Isolation	Input-Case & Input-Output 1500VDC Output-Case 500VDC (1500VDC @ 48V O/P)		
Mechanical Specification			
Length	14.5 in / 36.8 cm		
Width	9.9 in / 25.1 cm		
Height	5.5 in / 14.0 cm		
Clearance	1 inch (2.5 cm) all around		
Material	Marine Grade Aluminium		
Finish	Black Anodize / Powder Epoxy Coat		
Fastenings	All 18-8 Stainless Steel		
Weight	12.0 lb / 5.5 kg		
Connections	Four contact output terminals		
Warranty	Three years parts and labour		
Safety	Designed to meet CSA 22.2.107.1 & UL458		

Note: Specifications are subject to change without notice.



ANALYTIC SYSTEMS
Power Conversion Solutions

An ISO9001 and AS9100 Registered Company Battery Chargers • Inverters • Power Supplies • Voltage Converters

8128 River Way, Delta B.C. V4G 1K5 Canada T. 604.946.9981 F. 604.946.9983 TF. 800.668.3884 (US/CANADA)

www.analiticsystems.com